



## SRLs

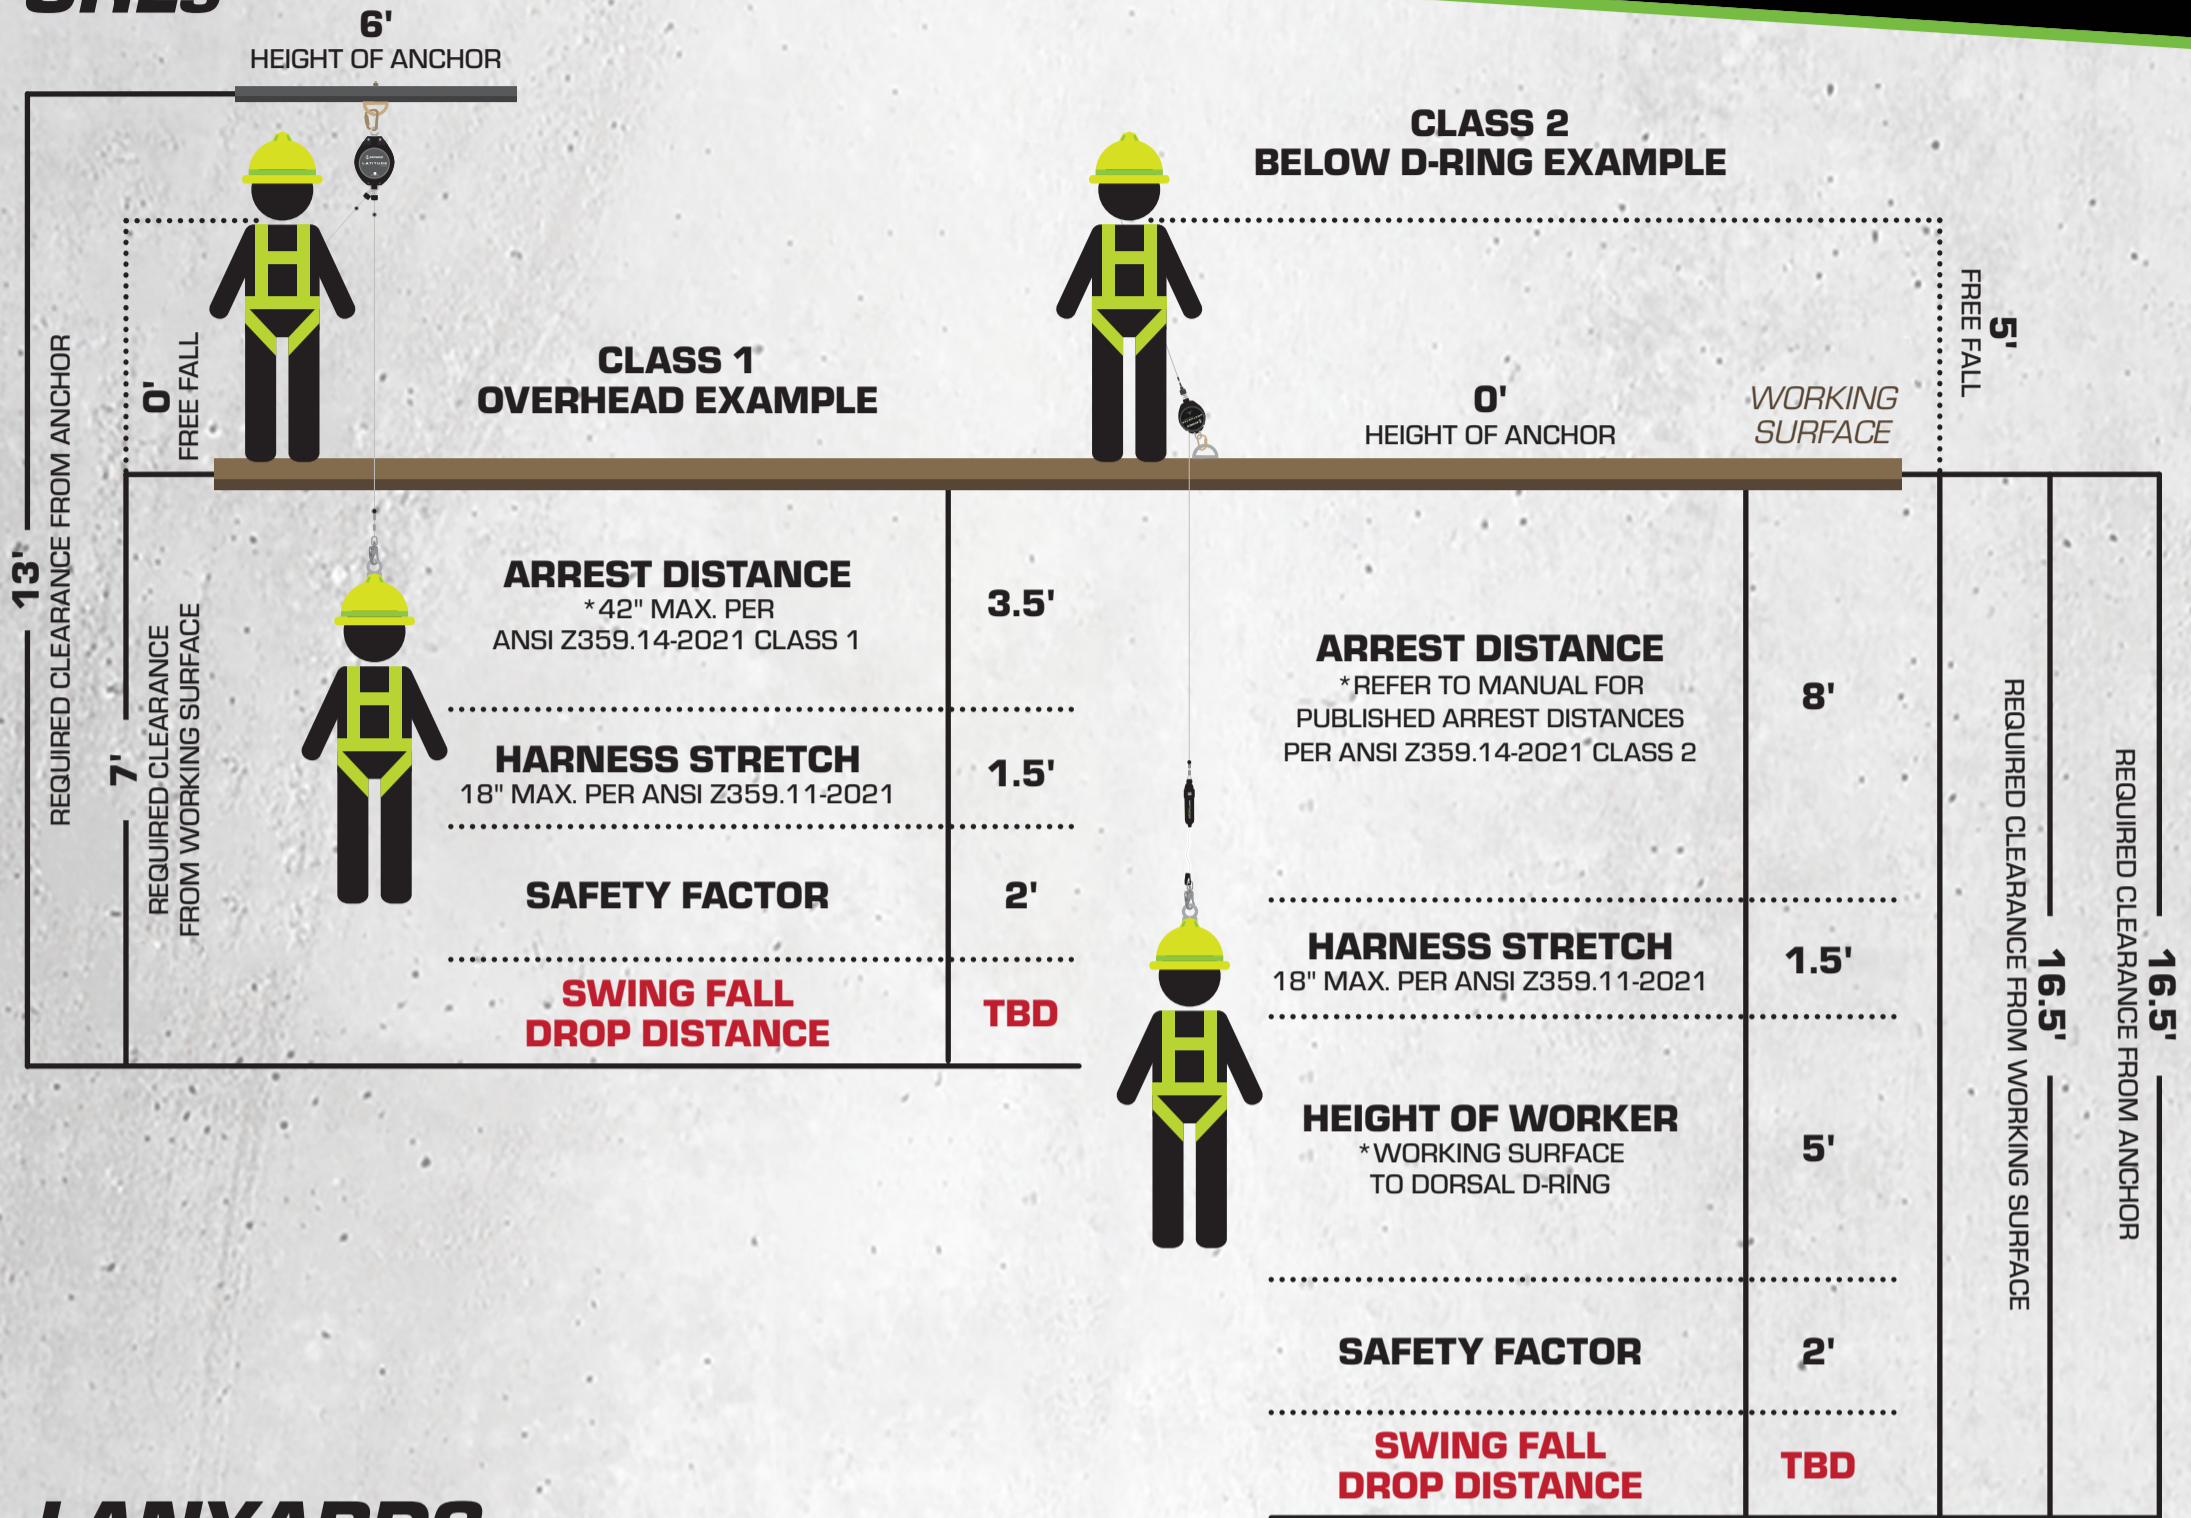

## LANYARDS

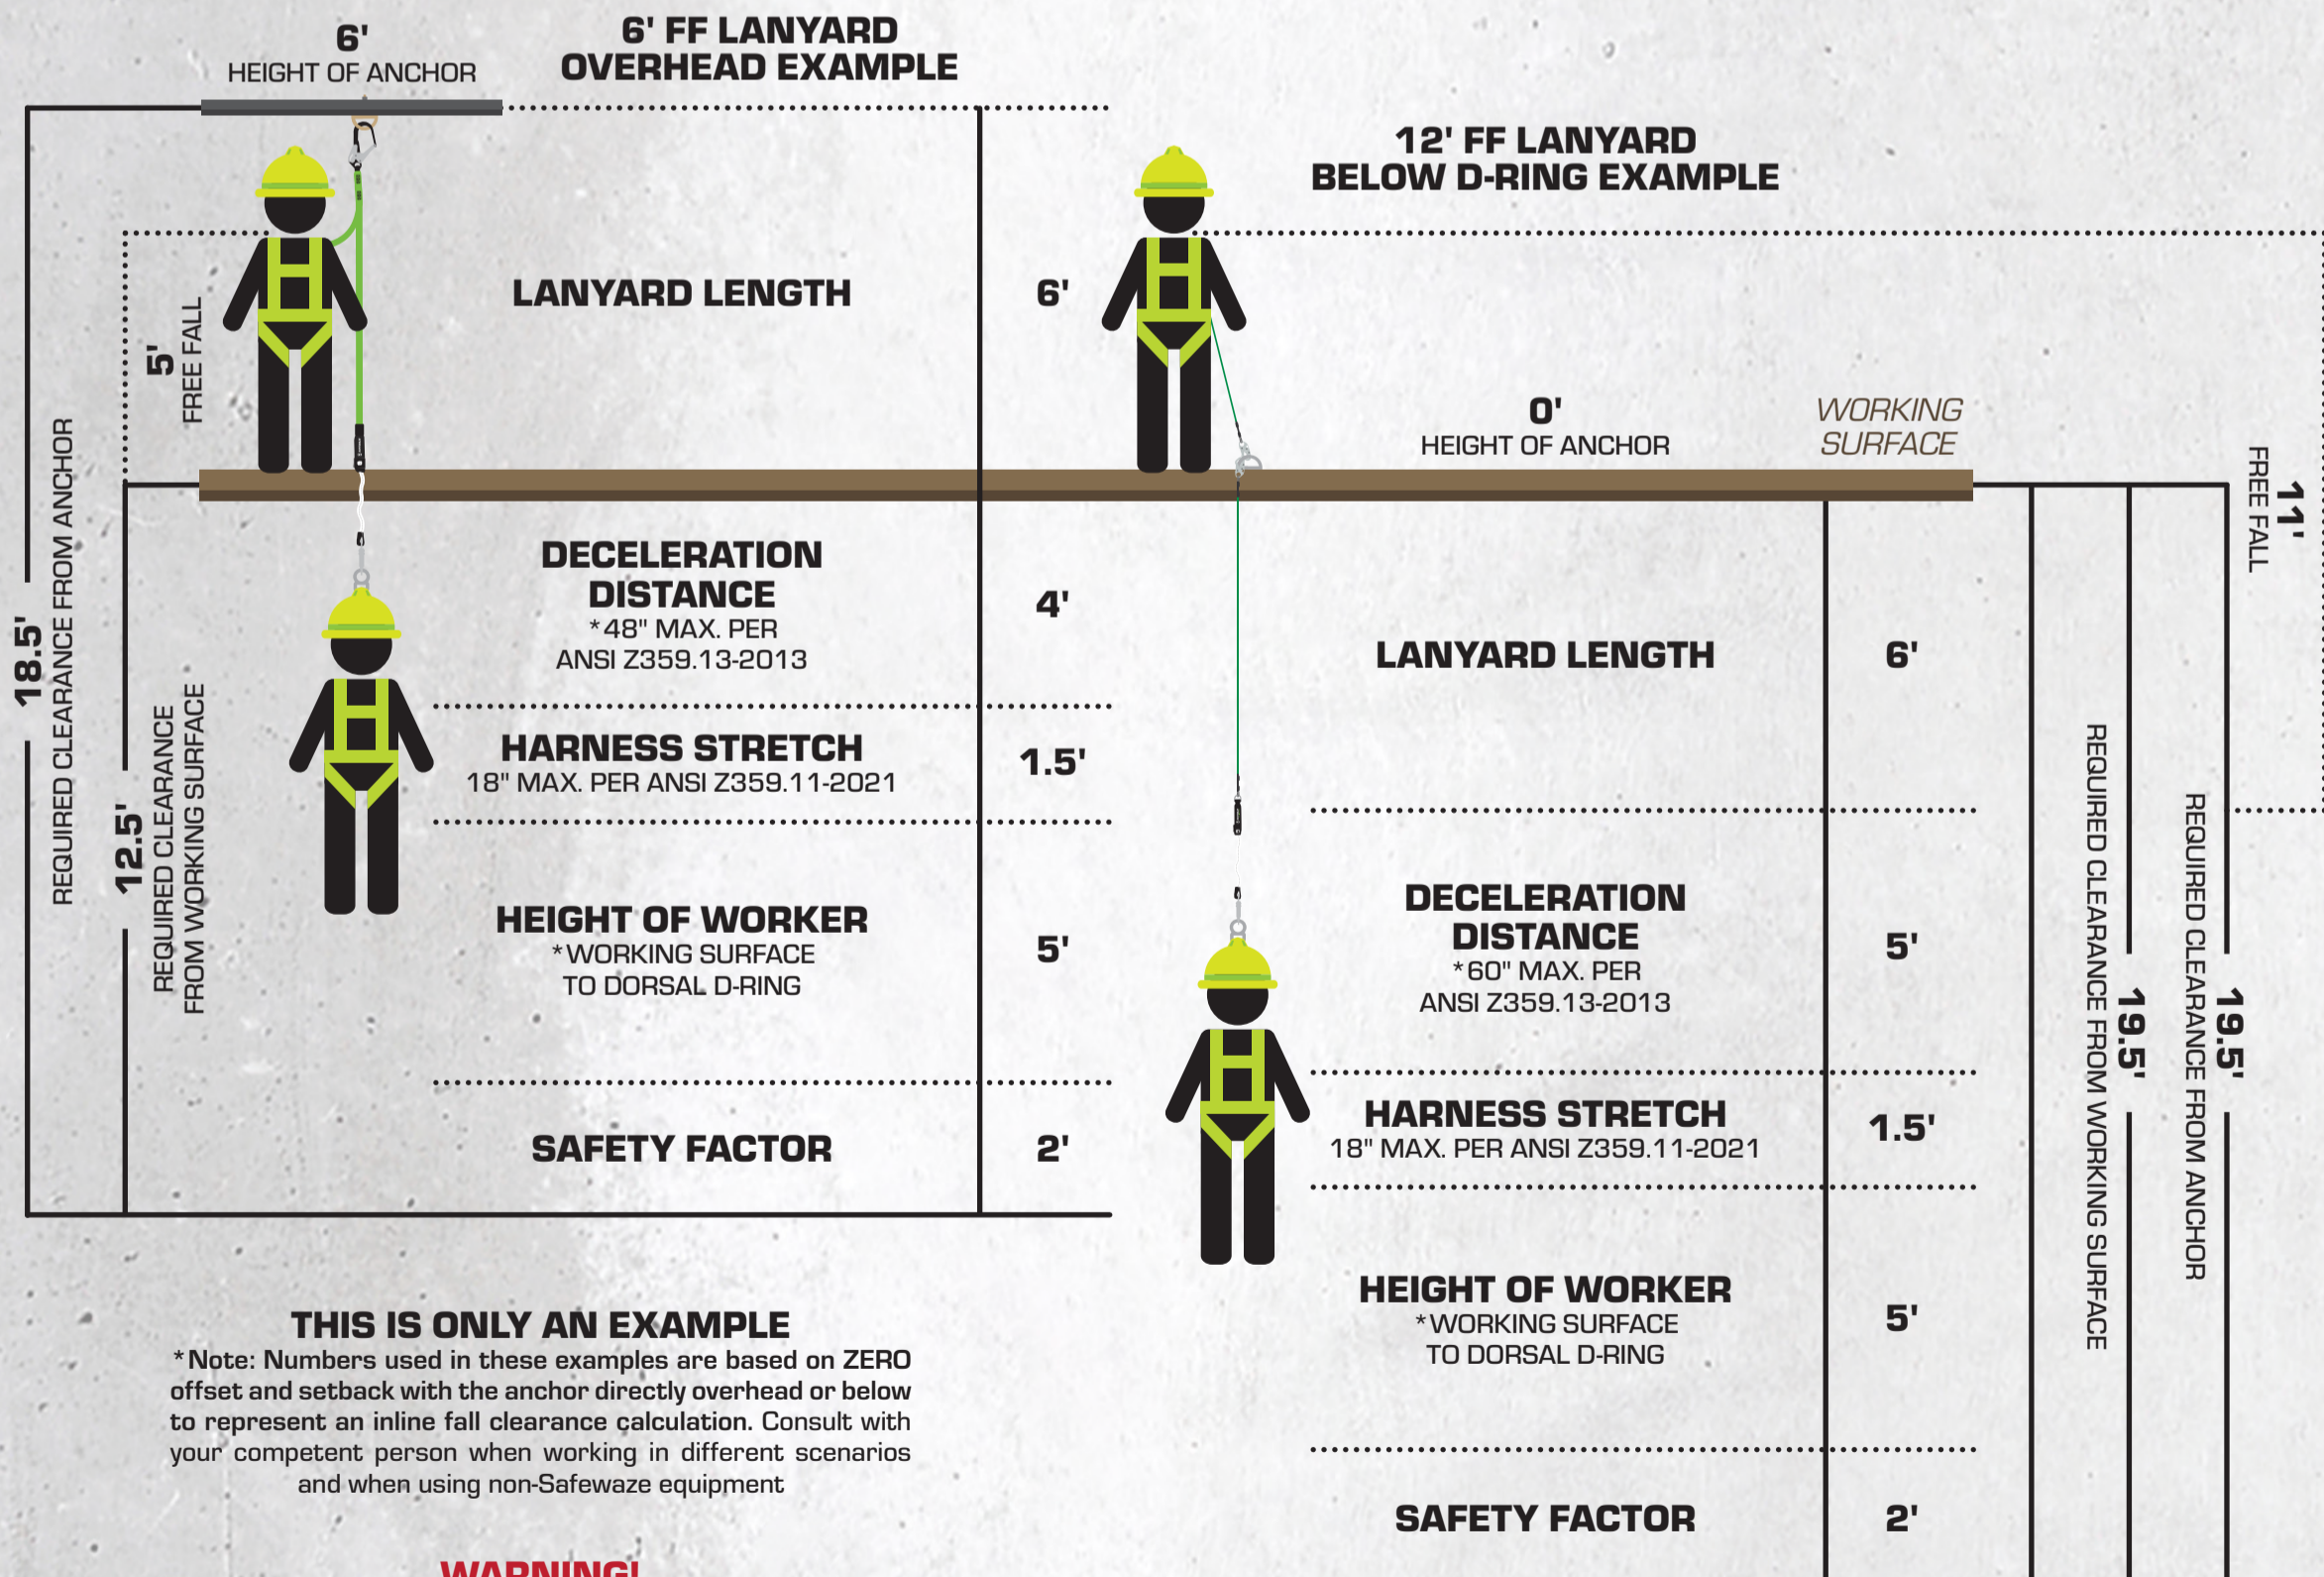

### THIS IS ONLY AN EXAMPLE

\* Note: Numbers used in these examples are based on ZERO offset and setback with the anchor directly overhead or below to represent an inline fall clearance calculation. Consult with your competent person when working in different scenarios and when using non-Safewaze equipment

### WARNING!

\* ELIMINATE SWING FALL BY WORKING AS CLOSE TO AND INLINE TO THE ANCHORAGE AS POSSIBLE

NOTE: DO NOT EXCEED 4' SWING FALL DROP DISTANCE PER ANSI Z359.6-2016